



## 2425 Power Supply

### Encapsulated Power Supply with Screw Terminals

As part of our ongoing commitment to making your installations easier than ever, AES has added an encapsulated power supply with screw terminals to our line of accessories. This new power supply ensures that you don't have to worry about available power from the alarm panel, eliminating unnecessary electrical work during your AES installations. The new power supply from AES:

- Shares the AC input in the alarm panel to power an AES 2.0 Subscriber.
- Eliminates the need for a dedicated power outlet for an AES 2.0 Subscriber

Please note that this product only works with AES's 2.0 Subscribers.



### Technical Specifications

#### INPUT VOLTAGE

85~264Vac

#### OUTPUT VOLTAGE

24.0 Volts

#### OUTPUT CURRENT


2.500 Amps

#### MAX POWER

60 Watts

### Mounting Specifications

TMP 60 models for chassis mount:

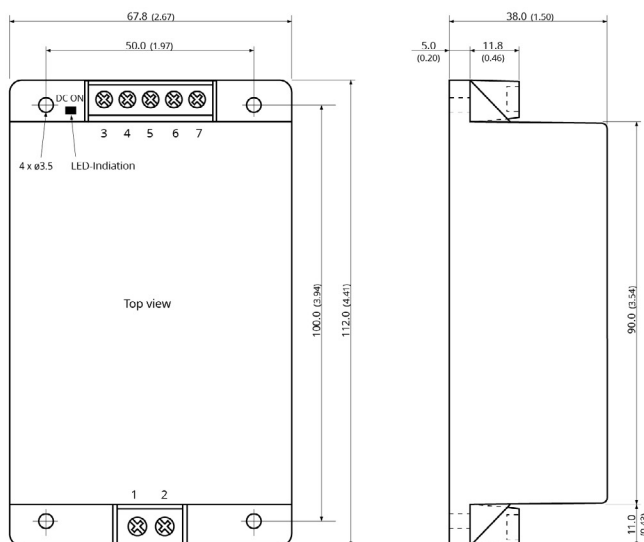

#### Connection

Pin	Single
1	AC (N)
2	AC (L)
3	NC
4	+Vout
5	NC
6	-Vout
7	NC

(NC = not connected)

Weight: 332 g (11.71 oz)

Dimensions in [mm], ( ) = Inches

Case tolerances:  $\pm 0.5$  ( $\pm 0.02$ )

Mounting hole tolerance:  $\pm 0.5$  ( $\pm 0.02$ )



aes-corp.com

AES Corporation | 285 Newbury St. | Peabody, MA 01960 United States

© 2023 AES Corporation and AES-IntelliNet® are registered trademarks of AES Corporation.

2425\_Rev2\_09292023