

Full Data Module

7794 AES-IntelliPro Fire Accessory Board™

TECHNICAL SPECIFICATIONS

- Transmits full data to AES receiver using Contact ID or Pulse formats
- Formats Supported: Contact ID, Pulse 3+1, Pulse 4+1, Pulse 4+2, and Modem IIe

I/O CONNECTIONS

- AES subscriber with power
- Handheld/PC programming port
- POTS incoming phone line
- Phone output from alarm panel
- Trouble output (form C relay)

SIZE

2.8 x 5.0 inches (7.1 cm x 12.7 cm)

WEIGHT


0.2 lbs (0.09 kgs)

POWER REQUIREMENTS

12 VDC nominal, primary and backup power provided by the AES RF Transceiver Unit

HOW TO ORDER

Model	Description
7794	AES-IntelliPro Fire. For Legacy subscribers
7794A	AES-IntelliPro Fire. For 2.0 subscribers

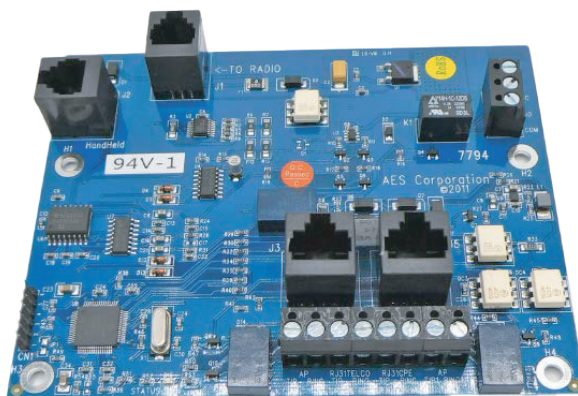

The 7794 AES-IntelliPro Fire™ is an add-on module for AES Subscribers that enables transmission of full alarm zone data from an alarm panel to a central station over an established AES-IntelliNet network.

AES Subscribers with AES-IntelliPro Fire can operate in applications with or without a phone line providing full emulation of the phone line for the alarm panel communicator. AES-IntelliPro Fire supports most popular alarm communication protocols including Contact ID and Pulse as well as Modem II converted to CID.

Features

- Commercial fire alarm applications - with or without phone lines
- Transmits full alarm data from any Contact ID or Pulse format fire alarm panel
- Supports expanded event reporting from Bosch Modem II alarm panels
- Primary or back-up communications
- Universal wireless alarm transmitter supports most manufacturers' panels
- Easy to install in AES subscriber
- Easily programs using an AES Handheld Programmer or laptop
- Option to remotely configure via a web browser
- Option to monitor telephone lines
- Transmits full data to AES receiver using Contact ID or Pulse formats
- Formats Supported: Contact ID, Pulse 3+1, Pulse 4+1, Pulse 4+2, and Modem IIe

Easy Installation

AES-IntelliPro Fire easily installs in the subscriber housing and is powered from the transceiver module, requiring no additional power connections. AES Subscribers can be ordered with AES-IntelliPro Fire installed. Legacy Fire Subscribers are easily programmed with a handheld programmer, while 2.0 Subscribers with a smart phone, tablet, or laptop.