


QT.	PN	DESCRIPTION
1		SUBSCRIBER
1	7220-10-N-TNCFB OR 7220-25-N-TNCFB	RG-58 W/ N MALE AND TNC FEMALE W/ BULKHEAD (VARING IN LENGTH 10FT, 25FT)
2	12-0104	RG-58 CONNECTOR TYPE N CRIMP ON
1	7210-6 OR 7210-7 OR 7210-9	6, 7 OR 9 dB ANTENNA WITH N FEMALE COMES WITH MOUNT
1	7230	SURGE PROTECTOR W/ TWO N FEMALES
1	7247	RG-58 CRIMP TOOL

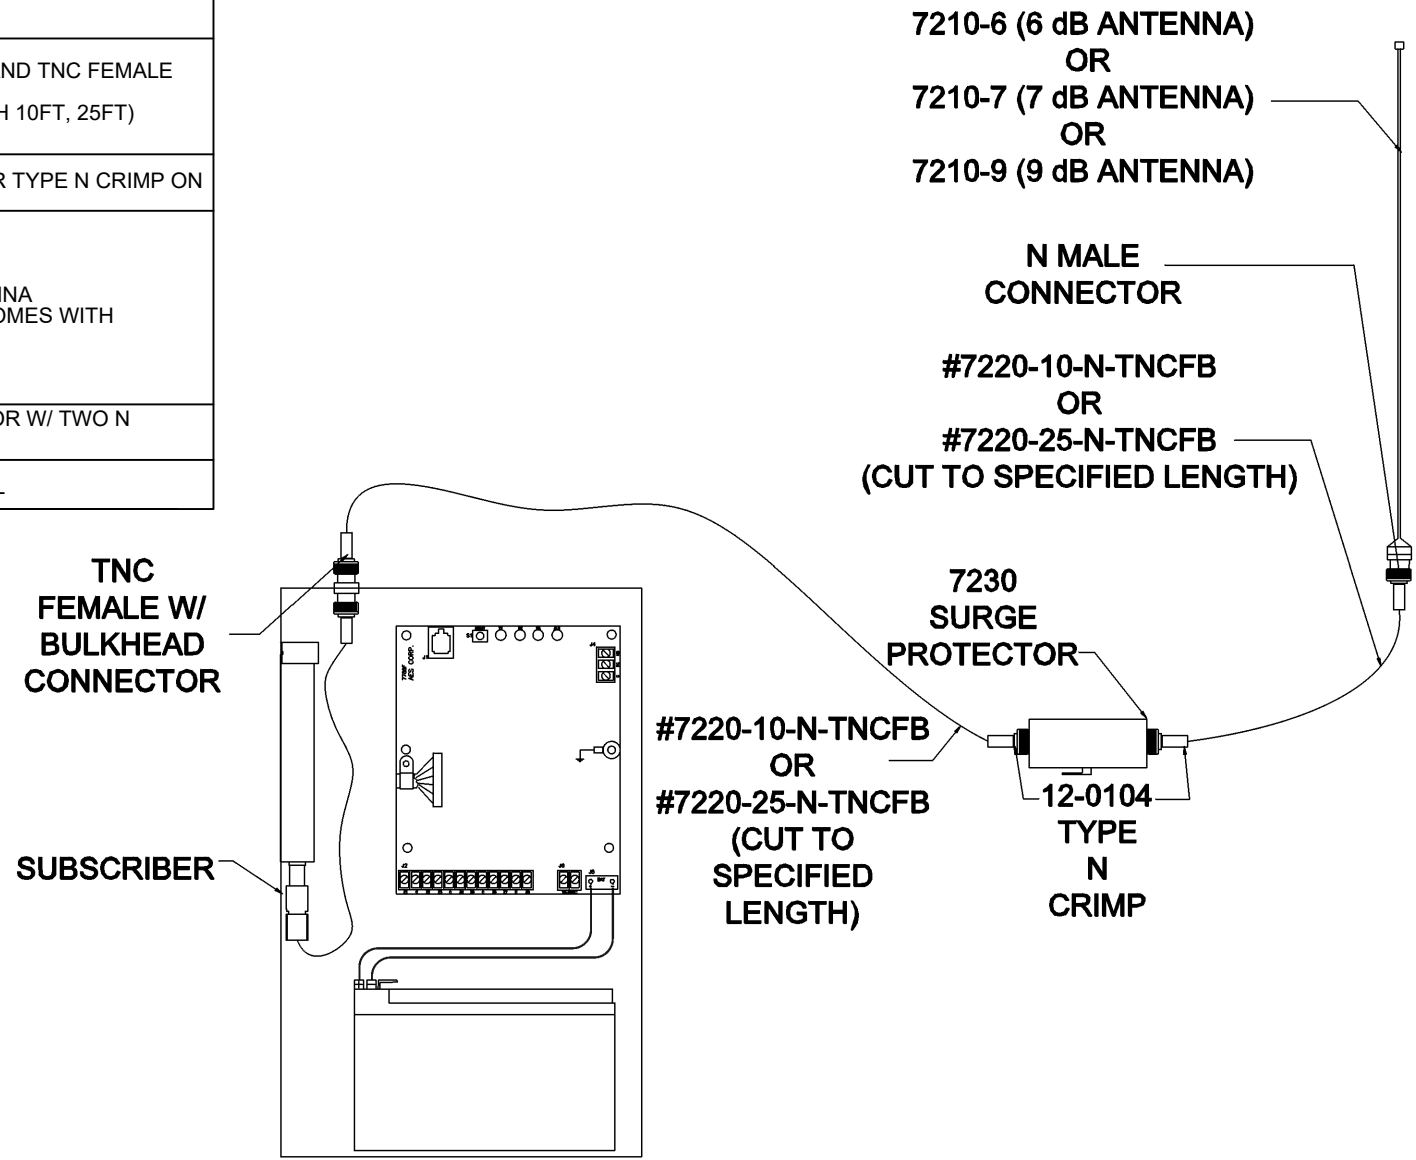

APPROVAL		TITLE	AES CORPORATION 40th ANNIVERSARY	
CAD/REVIT JULIAN VANCE	DATE 12/06/2021	6, 7, 9 dB ANTENNA EXTERIOR 25FT OR LESS	SCALE N/A	DRAWING NAME 6 7 9 EX 25 OR LESS.DWG
SALES MANAGER JIM BURRITT	DATE 12/06/2021		REV. 0	
DIR. OF PRODUCT MGMT. LAURA WALL	DATE 12/06/2021		SHEET 1 OF 1	

**GENERAL INSTALLATION NOTES:**  
 -ALL EXTERIOR ANTENNAS REQUIRE A SURGE PROTECTOR  
 -RECOMMENDED DISTANCE WHEN REMOTING ANTENNA IS 75 FT OR LESS.  
 -AS AN ALTERNATIVE YOU CAN USE (2) #7220-10-N-N RG58 CABLES WITH N CONNECTORS AND 12-0181-RFB